


BIOCYCLE-ENR ACTIVATED SLUDGE PROCESS

A2O Configuration

The **BioCycle-ENR Anaerobic-Anoxic-Aerobic (A2O)** process configuration is a biological nutrient removal treatment solution that is designed for facilities required to meet effluent total phosphorus and nitrogen limits. Utilizing the FlexZone™ Adaptive Process Volume System, the A2O process ensures the proper balance of anoxic, low dissolved oxygen (DO), and aerobic environments to meet nitrification and denitrification requirements under varying loading conditions throughout the life of the treatment facility. In addition to ensuring low levels of effluent total phosphorus and nitrogen, the FlexZone enables best carbon management practices to optimize energy and minimize chemical consumption.


THE PROBLEM: Conventional Approach

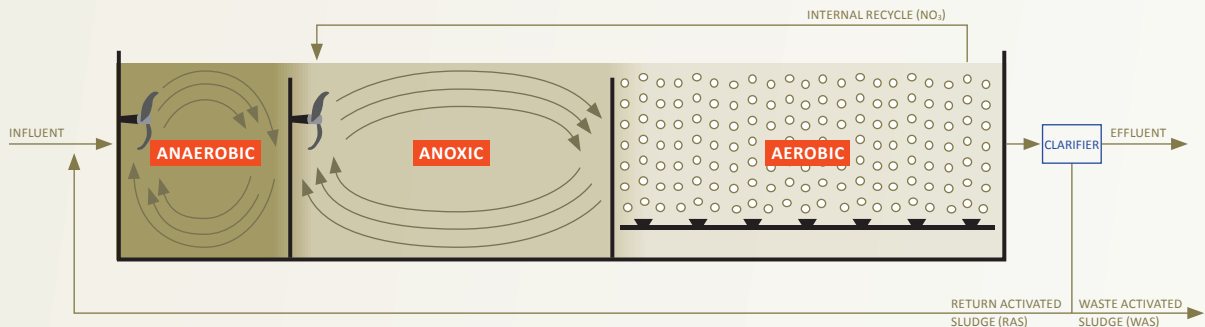

Fixed anaerobic, anoxic, and aerobic volumes are designed for a single future state condition, offering **limited flexibility** for all other operating conditions.

Conventional point source mixers **require physical baffles** to facilitate the mixing regime needed to ensure complete mixing.

THE SOLUTION: BioCycle-ENR for A2O

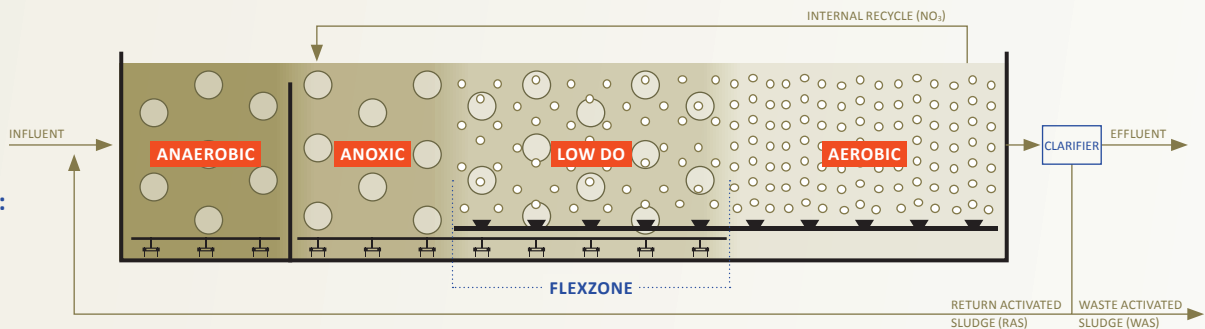

The **FlexZone** enables the anoxic, low DO, and aerobic volumes to **expand and contract** as operating conditions and kinetics change, ensuring effluent quality compliance.

The **vertical mixing regime of BioMix Compressed Gas Mixing** maintains the **integrity** of the anoxic and aerobic environments without the need for physical baffled zones.


SyncroMix, the unique combination of BioMix integrated with fine bubble diffused aeration, **creates low DO environments** and prevents mixing limited over-aerated conditions through **independent control of aeration and mixing**.

REDUCING ENERGY CONSUMPTION

According to Water Environment Research Foundation's Roadmap to Net Zero Energy, the three largest opportunities for energy savings at wastewater treatment plants are optimization of the aeration system, addition of an anoxic zone, and flexible sequencing of aeration basins. Utilizing low energy treatment options allows plants to get closer to energy neutrality. EnviroMix's BioCycle-ENR with FlexZone is perfectly suited to deliver on all three of these opportunities.

- BioCycle-ENR optimizes the aeration system by **matching the oxygen delivery to the oxygen demand through smart aeration controls** that have unmatched turn down and allow for low DO SyncroMix environments with independent control of aeration and mixing.
- Reducing required oxygen delivery by **manipulating the reactor environment to create anoxic conditions** recovers alkalinity and reduces nitrate recycle through denitrification kinetics.
- FlexZone takes sequencing to the next level without compromising mixing by dynamically **transitioning excess aerobic capacity** to energy-efficient mixing or low DO volumes.

* Water Environment Research Foundation.
Exploratory Team Report – Energy Management

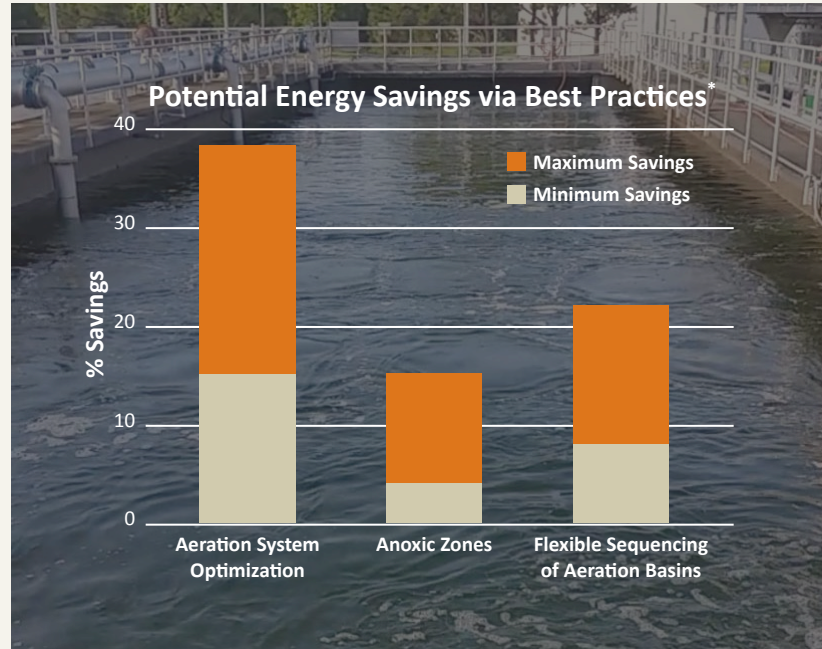

KEY ADVANTAGES FOR AN A2O CONFIGURATION



Process Optimization

- Capitalizing on the FlexZone, BioCycle-ENR utilizes the proven A2O activated sludge process to dynamically adapt anoxic and aerobic environments to changing temperature and loading conditions.
- Delivers the ability to ensure proper balance of anoxic and aerobic volumes to achieve effluent total nitrogen goals and minimize nitrate recycle to the anaerobic zone.



Energy Efficiency

- Provides energy efficient operation by decoupling aeration and mixing.
- Independently meets mixing and oxygen demands with SyncroMix — concurrent operation of BioMix Compressed Gas Mixing and diffused aeration.



Unparalleled Flexibility

- Offers a process configuration tailored to meet current and future total phosphorus and nitrogen objectives, minimizing energy and chemical consumption.
- Provides the ability to create or expand anoxic zones without adding additional tank volume.



Straightforward Operation

- Provides easy access to equipment outside of the tank.
- Requires minimal maintenance of in-tank equipment.

www.enviro-mix.com

701 East Bay Street, Suite 502 · Charleston, SC 29403

P: 843.573.7510 · F: 843.573.7531 · E: sales@enviro-mix.com

Contact sales@enviro-mix.com

**TO OPTIMIZE YOUR A2O CONFIGURATION
WITH BIOCYCLE-ENR.**